



ST1803DHI

HIGH VOLTAGE FAST-SWITCHING NPN POWER TRANSISTOR



- NEW SERIES, ENHANCED PERFORMANCE
- FULLY INSULATED PACKAGE FOR EASY MOUNTING
- INTEGRATED FREE WHEELING DIODE
- HIGH VOLTAGE CAPABILITY
- HIGH SWITCHING SPEED
- TIGHTER h_{fe} CONTROL
- IMPROVED RUGGEDNESS

APPLICATIONS:

- HORIZONTAL DEFLECTION FOR COLOR TV

DESCRIPTION

The ST1803DHI is manufactured using Diffused Collector technology for more stable operation Vs base drive circuit variations resulting in very low worst case dissipation.

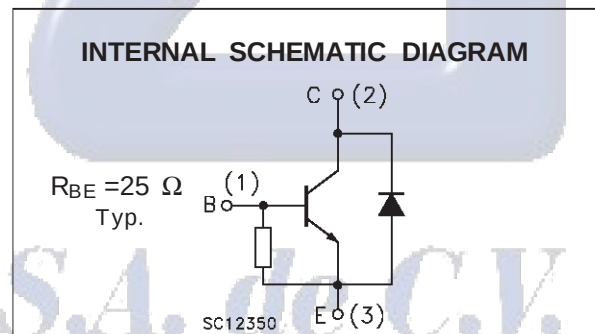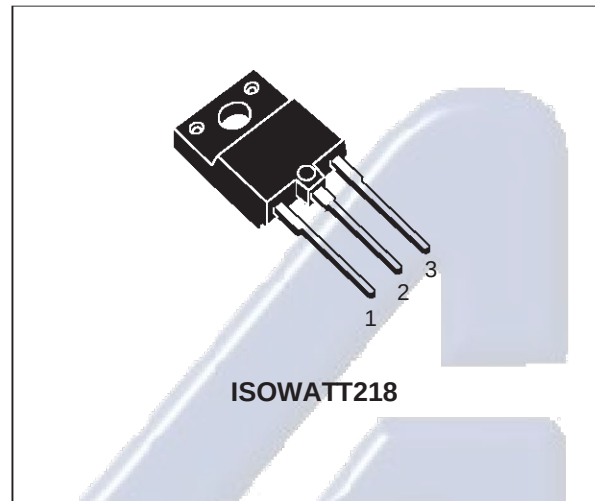

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage ($I_E = 0$)	1500	V
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	600	V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	7	V
I_C	Collector Current	10	A
I_{CM}	Collector Peak Current ($t_p < 5$ ms)	15	A
I_B	Base Current	4	A
P_{tot}	Total Dissipation at $T_C = 25^\circ\text{C}$	50	W
T_{stg}	Storage Temperature	-65 to 150	$^\circ\text{C}$
T_j	Max. Operating Junction Temperature	150	$^\circ\text{C}$

January 2000

ST1803DHI

THERMAL DATA

Rthj-case	Thermal Resistance Junction-case	Max	2.5	°C/W
-----------	----------------------------------	-----	-----	------


ELECTRICAL CHARACTERISTICS (Tcase = 25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
ICES	Collector Cut-off Current (VBE = 0)	VCE = 1500 V VCE = 1500 V Tj = 125 °C			1 2	mA mA
IEBO	Emitter Cut-off Current (IC = 0)	VEB = 4 V	130		400	mA
VCE(sat)*	Collector-Emitter Saturation Voltage	IC = 4 A IB = 0.8 A IC = 4 A IB = 1.2 A		3	5 1.5	V
VBE(sat)*	Base-Emitter Saturation Voltage	IC = 4 A IB = 0.8 A			1.2	V
hFE*	DC Current Gain	IC = 1 A VCE = 5 V IC = 4.5 A VCE = 5 V	10 4	15	20 9	
VF	Diode Forward Voltage	IF = 5 A		1.5	2	V
BVEBO	Emitter-Breakdown Voltage	IE = 700 mA	7			V
ts tf	INDUCTIVE LOAD Storage Time Fall Time	IC = 4 A LB = 5 µH f = 16 KHz IBon(END) = 0.8 A VBB = -2.5 V		5 0.3	6 0.6	µs µs


* Pulsed: Pulse duration = 300 µs, duty cycle 1.5 %

Electrónica S.A. de C.V.

Safe Operating Area

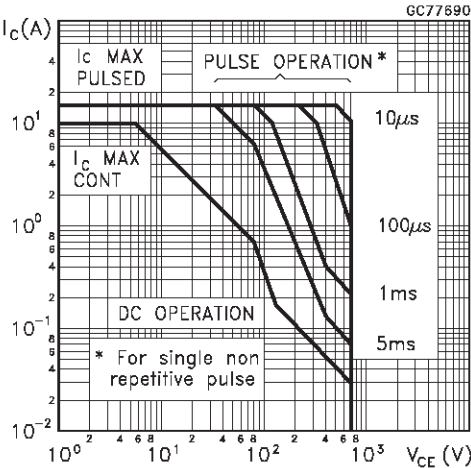


Thermal Impedance

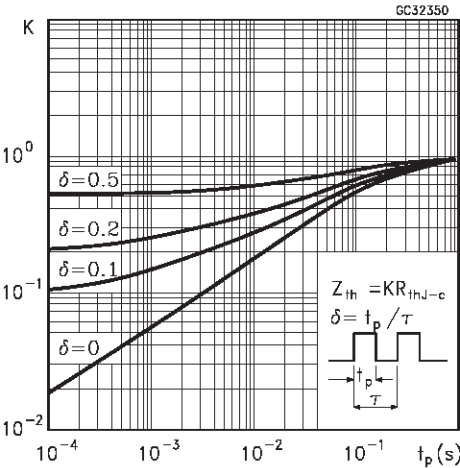


ST1803DHI


Derating Curve

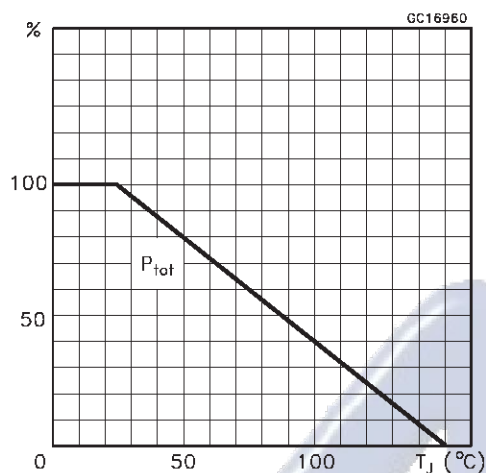


Biase Emitter Saturation Voltage

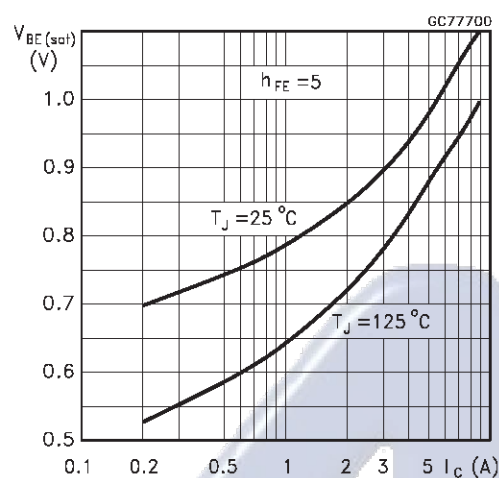


Collector Emitter Saturation Voltage

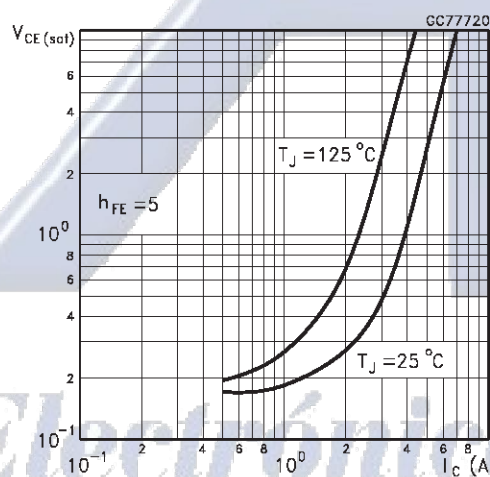


DC Current Gain

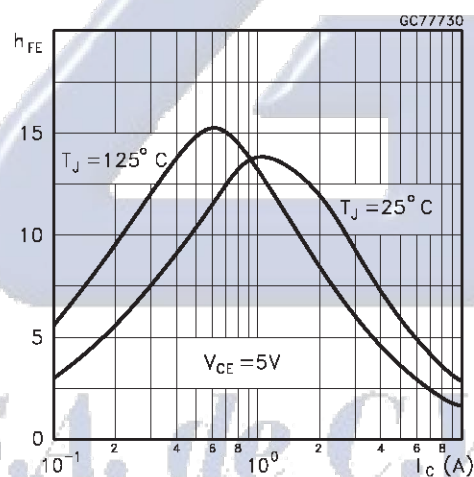

Power Losses At 16 KHz

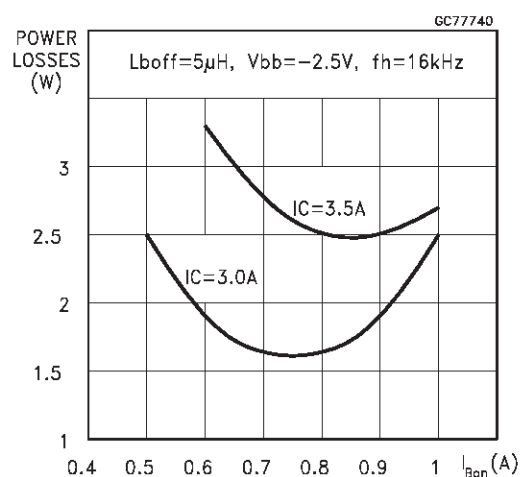


Switching Time Inductive Load

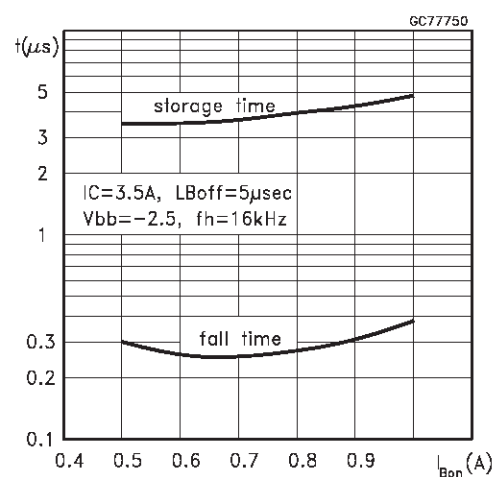


ST1803DHI

Reverse Biased SOA

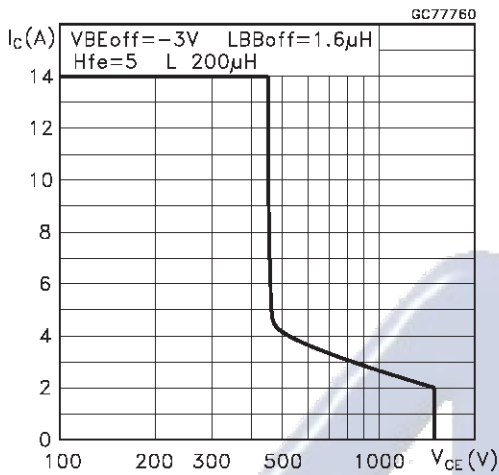

Inductive Load Switching Test Circuits.

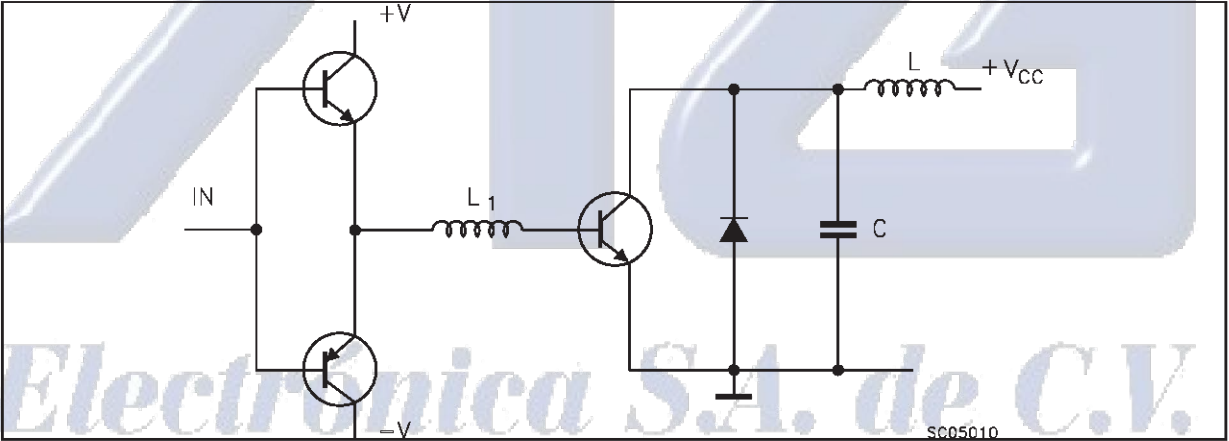

ISOWATT218 NARROW LEADS MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	5.35		5.65	0.211		0.222
C	3.30		3.80	0.130		0.150
D	2.90		3.10	0.114		0.122
D1	1.88		2.08	0.074		0.082
E	0.75		0.95	0.030		0.037
F	0.75		0.95	0.030		0.037
F2	1.50		1.70	0.059		0.067
F3	1.90		2.10	0.075		0.083
F5			1.10			0.043
G	10.80		11.20	0.425		0.441
H	15.80		16.20	0.622		0.638
L		9			0.354	
L1	20.80		21.20	0.819		0.835
L2	19.10		19.90	0.752		0.783
L3	22.80		23.60	0.898		0.929
L4	40.50		42.50	1.594		1.673
L5	4.85		5.25	0.191		0.207
L6	20.25		20.75	0.797		0.817
N	2.1		2.3	0.083		0.091
R		4.6			0.181	
DIA	3.5		3.7	0.138		0.146

