



SUP/SUB65P06-20


Vishay Siliconix

P-Channel 60-V (D-S), 175°C MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$ (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-60	0.020	-65 ^a

TO-220AB




Top View

SUP65P06-20

DRAIN connected to TAB


TO-263



Top View

SUB65P06-20

175°C Rated
Maximum Junction Temperature
TrenchFET®
Power MOSFETs

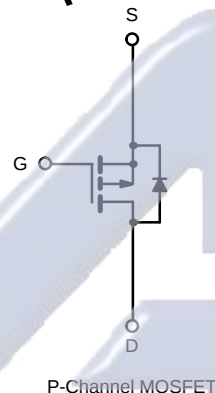ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

Parameter		Symbol	Limit	Unit
Gate-Source Voltage		V _{GS}	± 20	V
Continuous Drain Current (T _J = 175°C)	T _C = 25°C	I _D	−65 ^a	A
	T _C = 125°C		−39	
Pulsed Drain Current		I _{DM}	−200	
Avalanche Current		I _{AR}	−60	
Repetitive Avalanche Energy ^b		E _{AR}	180	mJ
Power Dissipation	T _C = 25°C (TO-220AB and TO-263)	P _D	250 ^d	W
	T _A = 125°C (TO-263) ^c		3.7	
Operating Junction and Storage Temperature Range		T _J , T _{stg}	−55 to 175	°C

THERMAL RESISTANCE RATINGS

Parameter		Symbol	Limit	Unit
Junction-to-Ambient	PCB Mount (TO-263) ^c	R_{thJA}	40	$^\circ\text{C/W}$
	Free Air (TO-220AB)	R_{thJA}	62.5	
Junction-to-Case		R_{thJC}	0.6	

Notes:

- Package limited.
- Duty cycle $\leq 1\%$.
- When mounted on 1" square PCB (FR-4 material).
- See SOA curve for voltage derating.

For SPICE model information via the Worldwide Web: <http://www.vishay.com/www/product/spice.htm>

SUP/SUB65P06-20

Vishay Siliconix



SPECIFICATIONS (T _J = 25° C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = -250 μA	-60			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 μA	-2.0	-3.0	-4.0	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -60 V, V _{GS} = 0 V			-1	μA
		V _{DS} = -60 V, V _{GS} = 0 V, T _J = 125° C			-50	
		V _{DS} = -60 V, V _{GS} = 0 V, T _J = 175° C			-150	
On-State Drain Current ^a	I _{D(on)}	V _{DS} = -5 V, V _{GS} = -10 V	-120			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = -10 V, I _D = -30 A		0.017	0.020	Ω
		V _{GS} = -10 V, I _D = -30 A, T _J = 125° C			0.033	
		V _{GS} = -10 V, I _D = -30 A, T _J = 175° C			0.042	
Forward Transconductance ^a	g _{fs}	V _{DS} = -15 V, I _D = -30 A	25			S
Dynamic ^b						
Input Capacitance	C _{iss}	V _{GS} = 0 V, V _{DS} = -25 V, f = 1 MHz		4500		pF
Output Capacitance	C _{oss}			870		
Reverse Transfer Capacitance	C _{rss}			350		
Total Gate Charge ^c	Q _g	V _{DS} = -30 V, V _{GS} = -10 V, I _D = -65 A		85	120	nC
Gate-Source Charge ^c	Q _{gs}			24		
Gate-Drain Charge ^c	Q _{gd}			22		
Turn-On Delay Time ^c	t _{d(on)}	V _{DD} = -30 V, R _L = 0.47 Ω I _D ≈ -65 A, V _{GEN} = -10 V, R _G = 2.5 Ω		15	40	ns
Rise Time ^c	t _r			40	80	
Turn-Off Delay Time ^c	t _{d(off)}			65	120	
Fall Time ^c	t _f			30	60	
Source-Drain Diode Ratings and Characteristics (T _C = 25° C) ^b						
Continuous Current	I _S				-65	A
Pulsed Current	I _{SM}				-200	
Forward Voltage ^a	V _{SD}	I _F = -65 A, V _{GS} = 0 V		-1.1	-1.4	V
Reverse Recovery Time	t _{rr}	I _F = -65 A, di/dt = 100 A/μs		70	120	ns
Peak Reverse Recovery Current	I _{RM(REC)}			7	9	A
Reverse Recovery Charge	Q _{rr}				0.245	0.54

Notes:







- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
b. Guaranteed by design, not subject to production testing.
c. Independent of operating temperature.



SUP/SUB65P06-20

Vishay Siliconix

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

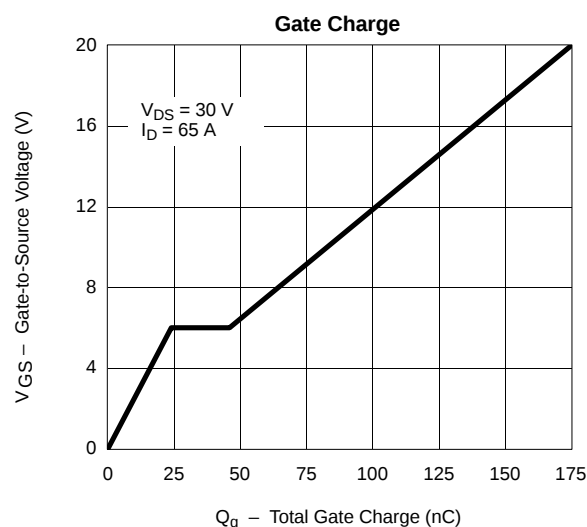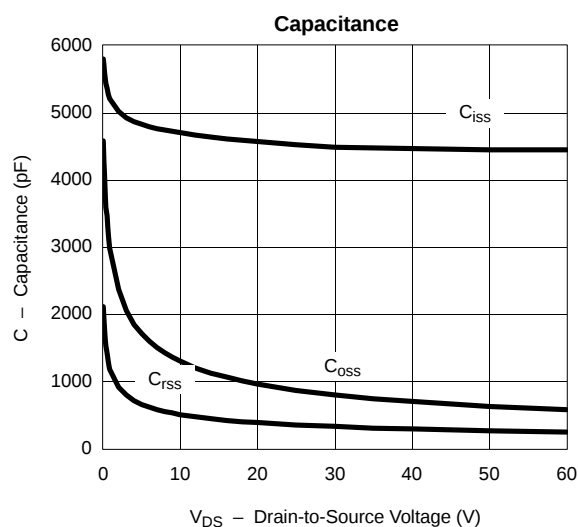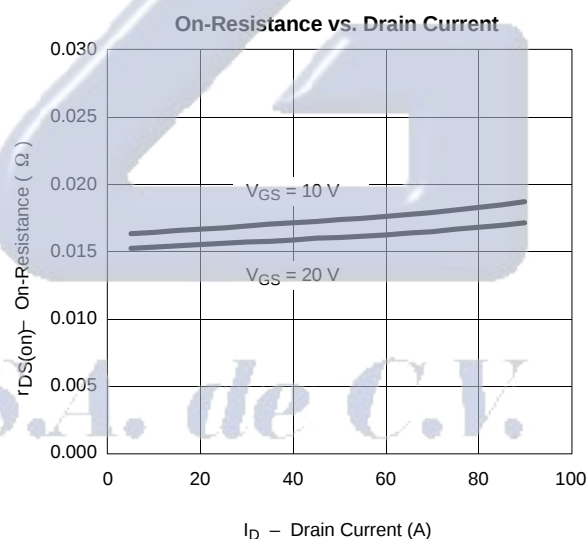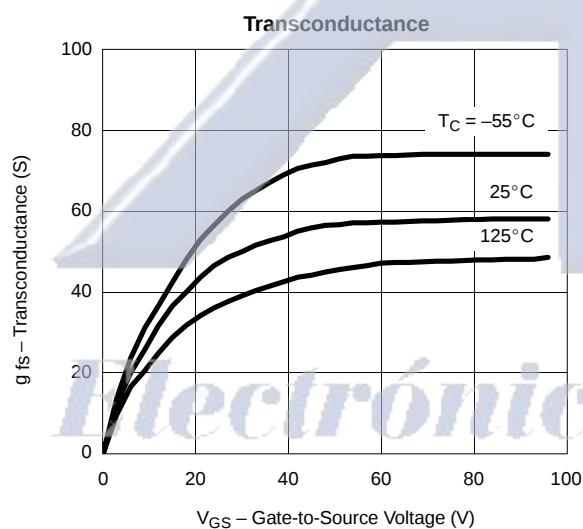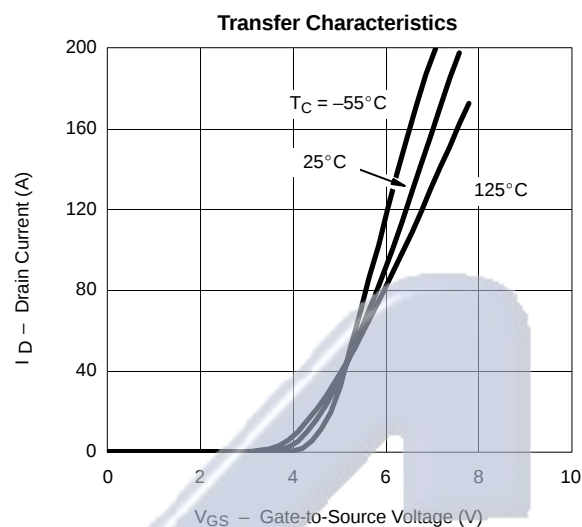
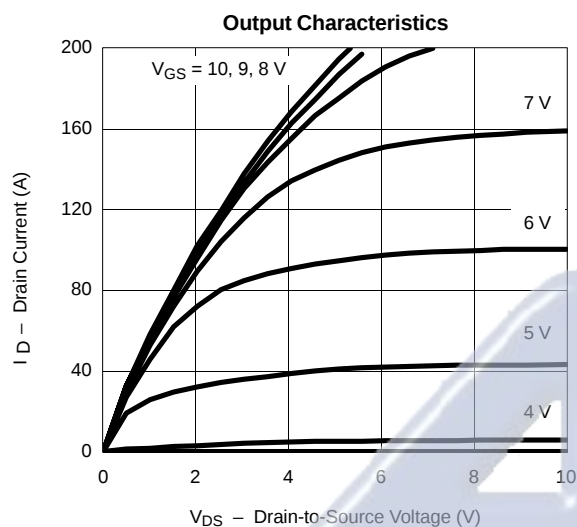


SUP/SUB65P06-20




Vishay Siliconix



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

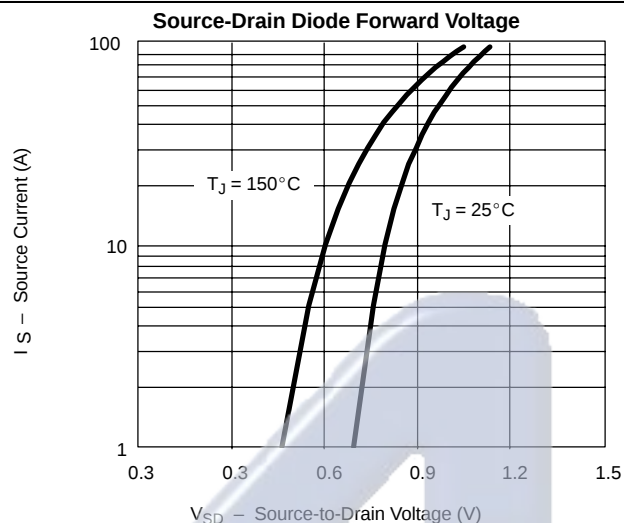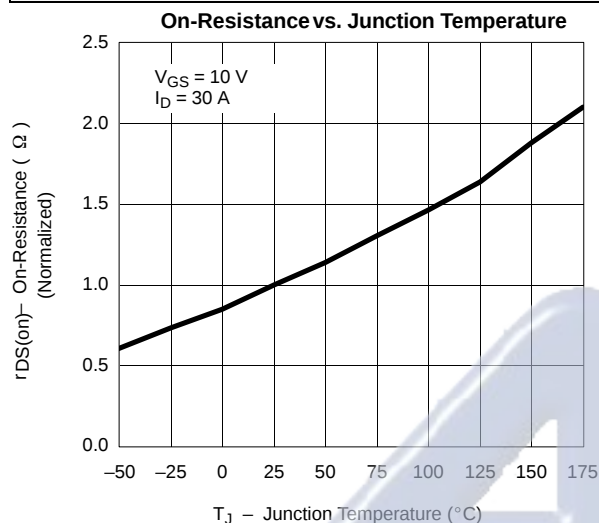

THERMAL RATINGS

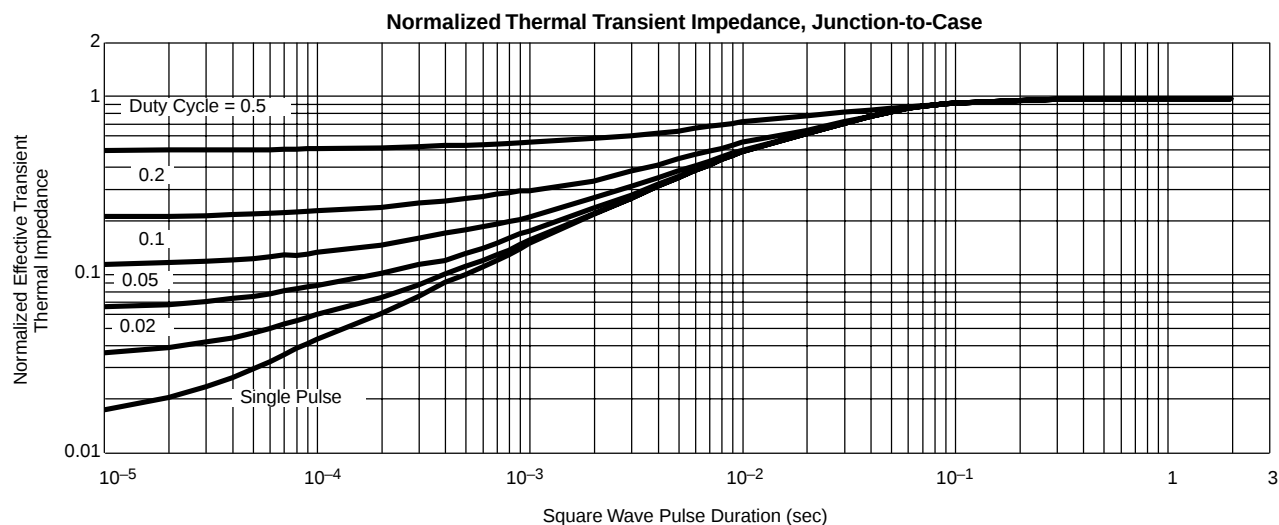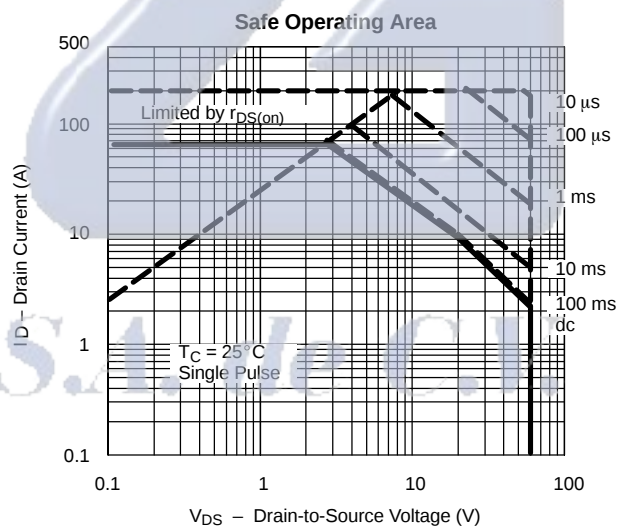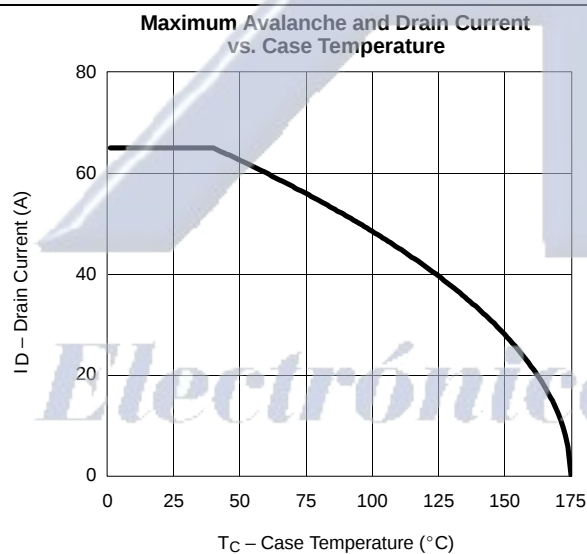

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.



Electrónica S.A. de C.V.