

SURFACE MOUNT ULTRA FAST RECOVERY RECTIFIER

FEATURES


- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- High efficiency
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: SOD-123FL
- Terminals: Solderable per MIL-STD-750, Method 2026 Approx.
- Weight: 15mg 0.00053oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

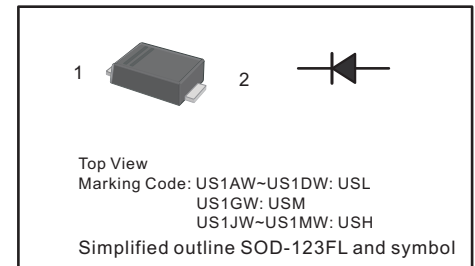

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25 °C ambient temperature unless otherwise specified.
- Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	US1AW	US1BW	US1DW	US1GW	US1JW	US1KW	US1MW	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at Ta = 65 °C	I _{F(AV)}	1							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	30							A
Maximum Instantaneous Forward Voltage at 1 A	V _F	1.0			1.3	1.65			V
Maximum DC Reverse Curren Ta = 25 °C at Rated DC Blocking Voltage ^t Ta =125 °C	I _R	5 50							μA
Maximum Reverse Recovery Time ¹⁾	t _{rr}	50				75			ns
Typical Thermal Resistance ²⁾	R _{θJA}	120							°C/W
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150							°C

Notes:

1) Measured with $I_F = 0.5\text{ A}$, $I_R = 1\text{ A}$, $I_T = 0.25\text{ A}$.

2) P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.

SURFACE MOUNT ULTRA FAST RECOVERY RECTIFIER

RATINGS AND CHARACTERISTICS OF US1AW - US1MW

Fig.1 Forward Current Derating Curve

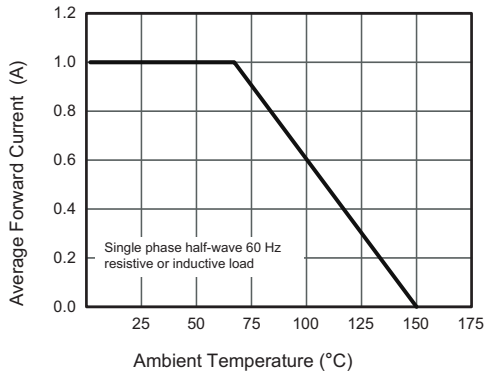


Fig.2 Typical Reverse Characteristics

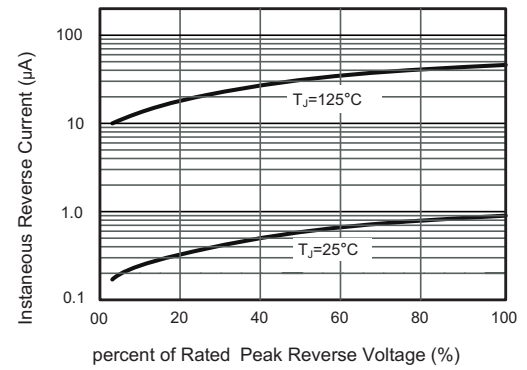


Fig.3 Typical Forward Characteristics


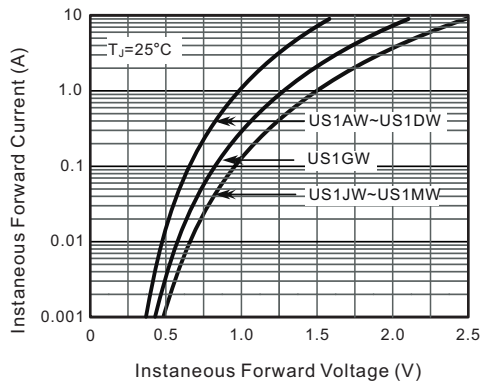


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

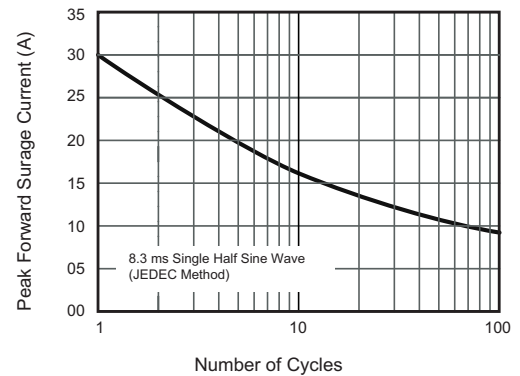


SURFACE MOUNT ULTRA FAST RECOVERY RECTIFIER

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-123FL

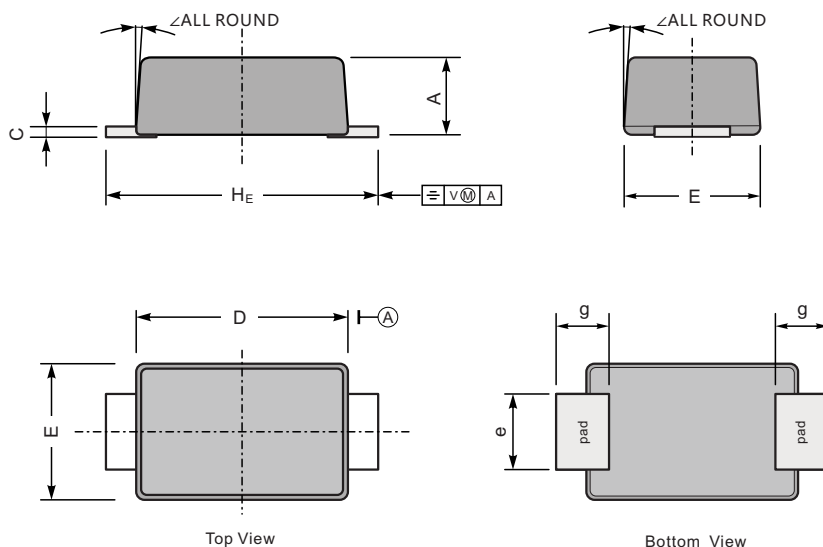

UNIT		A	C	D	E	e	g	H _E	∠
mm	max	1.1	0.20	2.9	1.9	1.1	0.9	3.8	7°
	min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	
mil	max	43	7.9	114	75	43	35	150	
	min	35	4.7	102	67	31	28	138	

The recommended mounting pad size

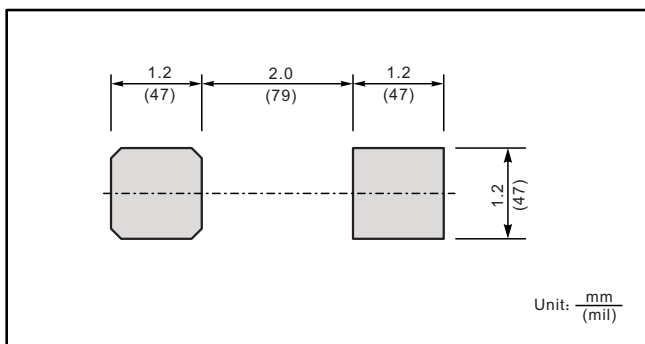

Marking

Type number	Marking code
US1AW	USL
US1BW	
US1DW	
US1GW	USM
US1JW	USH
US1KW	
US1MW	

Disclaimer

All product, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.