

DIGI XBEE³ ZIGBEE 3.0

Easy-to-add connectivity in a compact, low-power, low-profile footprint.

Digi XBee3™ modules accelerate time to market for designers, OEMs and solution providers by quickly enabling wireless connectivity and easy-to-add functionality. Building on industry-leading technology, pre-certified Digi XBee3™ modules offer the flexibility to switch between multiple frequencies and wireless protocols as needed.

Digi XBee3™ ZigBee 3.0 offers a fully interoperable ecosystem covering all vertical markets including building automation, smart energy, digital health, intelligent lighting, and others.

With Digi Remote Manager®, Digi XBee3™ modules can be easily configured and controlled from a simple, central platform. Built-in Digi TrustFence® security, identity and

data privacy features use more than 175 controls to protect against new and evolving cyber threats. MicroPython and XCTU software tools simplify adding functionality, configuration and testing.

From edge computing to future migration, Digi XBee modules offer size, weight, power and performance advantages ideal for scalable device connectivity. A versatile addition to the expanding Digi XBee Ecosystem of wireless modules, adapters and software, the Digi XBee3™ Series is engineered to accelerate development and deployment.

SIZE AND FLEXIBILITY

- At 13 mm x 19 mm, the new Digi XBee3™ micro form factor allows for more compact and portable applications
- Digi XBee3™ is one module for all protocols including: ZigBee, 802.15.4, DigiMesh and BLE, all configurable via Digi XCTU

PROGRAMMABILITY

- Eliminate the need for an external microcontroller and create smart end nodes and low-end gateways using MicroPython

SECURITY

- Intrinsic IoT security with Digi TrustFence®, a layered approach securing the edge device, through the gateway, into and out of the IoT

RELATED PRODUCTS AND SERVICES



Development Kits



Digi XCTU



Digi TrustFence®




Digi Remote Manager®



Digi Design Services

APPLICATION EXAMPLE

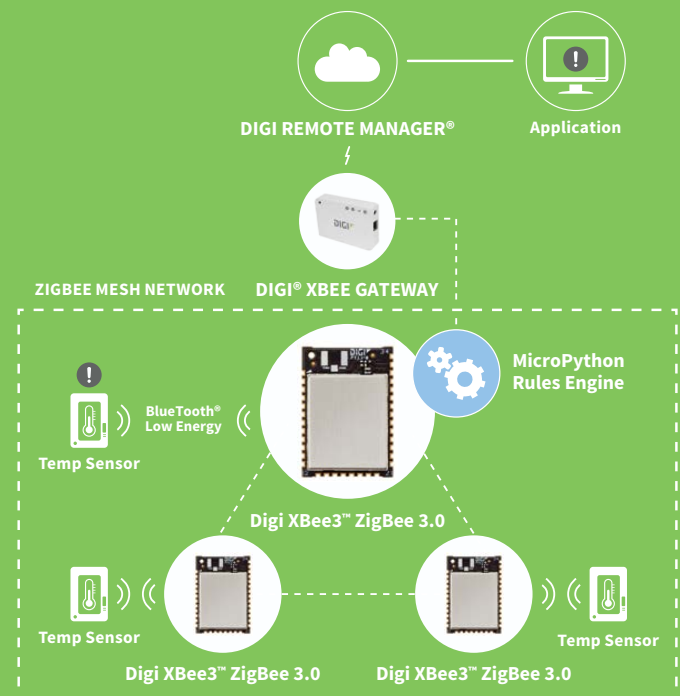



SPECIFICATIONS		Digi XBee3™ ZigBee 3.0	Digi XBee3™ PRO ZigBee 3.0
PERFORMANCE			
TRANSCEIVER CHIPSET	Silicon Labs EFR32MG SoC		
DATA RATE	RF 250 Kbps, Serial up to 1 Mbps		
INDOOR/URBAN RANGE*	Up to 200 ft (60 m)	Up to 300 ft (90 m)	
OUTDOOR/RF LINE-OF-SIGHT RANGE*	Up to 4000 ft (1200 m)	Up to 2 miles (3200 m)	
TRANSMIT POWER	+8 dBm	+19 dBm	
RECEIVER SENSITIVITY (1% PER)	-103 dBm Normal Mode		
FEATURES			
SERIAL DATA INTERFACE	UART, SPI, I²C		
CONFIGURATION METHOD	API or AT commands, local or over-the-air (OTA)		
FREQUENCY BAND	ISM 2.4 GHz		
FORM FACTOR	Micro, Through-Hole, Surface Mount		
INTERFERENCE IMMUNITY	DSSS (Direct Sequence Spread Spectrum)		
ADC INPUTS	(4) 10-bit ADC inputs		
DIGITAL I/O	15		
ANTENNA OPTIONS	Through-Hole: PCB Antenna, U.FL Connector, RPSMA Connector SMT: RF Pad, PCB Antenna, or U.FL Connector Micro: U.FL Antenna, RF Pad, Chip Antenna		
OPERATING TEMPERATURE	-40° C to +85° C		
DIMENSIONS (L X W X H)	Through-Hole: 0.960 x 1.087 in (2.438 x 2.761 cm) SMT: 0.866 x 1.33 x 0.120 in (2.199 x 3.4 x 0.305 cm) Micro: 0.533 x 0.76 x 0.087 in (13 x 19 x 2 mm)		
PROGRAMMABILITY			
MEMORY	1 MB / 128 KB RAM		
CPU/CLOCK SPEED	HCS08 / up to 50.33 MHz		
NETWORKING AND SECURITY			
PROTOCOL	ZigBee® 3.0		
ENCRYPTION	128/256 bit AES		
RELIABLE PACKET DELIVERY	Retries/Acknowledgements		
IDS	PAN ID and addresses, cluster IDs and endpoints (optional)		
CHANNELS	16 channels		
POWER REQUIREMENTS			
SUPPLY VOLTAGE	2.1 to 3.6V		
TRANSMIT CURRENT	40 mA @ 8 dBm	135 mA @ 19 dBm	
RECEIVE CURRENT	15 mA		
POWER-DOWN CURRENT	1.7 micro Amp @ 25 degrees C		
REGULATORY APPROVALS			
FCC, IC (NORTH AMERICA)	Yes	Yes	
ETSI (EUROPE)	Yes	No	

*Range figure estimates are based on free-air terrain with limited sources of interference. Actual range will vary based on transmitting power, orientation of transmitter and receiver, height of transmitting antenna, height of receiving antenna, weather conditions, interference sources in the area, and terrain between receiver and transmitter, including indoor and outdoor structures such as walls, trees, buildings, hills, and mountains.

PART NUMBERS	DESCRIPTION
XB3-24Z8RM-J	Digi XBee3 ZigBee 3.0, 2.4 GHz, Micro, RF Pad Ant, MMT
XB3-24Z8UM-J	Digi XBee3 ZigBee 3.0, 2.4 GHz, Micro, U.FL Ant, MMT
XB3-24Z8CM-J	Digi XBee3 ZigBee 3.0, 2.4 GHz, Micro, Chip Ant, MMT
XB3-24Z8RM	Digi XBee3 PRO ZigBee 3.0, 2.4 GHz, Micro, RF Pad Ant, MMT
XB3-24Z8UM	Digi XBee3 PRO ZigBee 3.0, 2.4 GHz, Micro, U.FL Ant, MMT
XB3-24Z8CM	Digi XBee3 PRO ZigBee 3.0, 2.4 GHz, Micro, Chip Ant, MMT
XB3-24Z8ST-J	Digi XBee3, 2.4 Ghz ZB 3.0, SMA Ant, TH MT
XB3-24Z8UT-J	Digi XBee3, 2.4 Ghz ZB 3.0, U.FL Ant, TH MT
XB3-24Z8PT-J	Digi XBee3, 2.4 Ghz ZB 3.0, PCB Ant, TH MT
XB3-24Z8ST	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, SMA Ant, TH MT
XB3-24Z8UT	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, U.FL Ant, TH MT
XB3-24Z8PT	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, PCB Ant, TH MT
XB3-24Z8RS-J	Digi XBee3, 2.4 Ghz ZB 3.0, RF Pad Ant, SMT
XB3-24Z8US-J	Digi XBee3, 2.4 Ghz ZB 3.0, U.FL Ant, SMT
XB3-24Z8PS-J	Digi XBee3, 2.4 Ghz ZB 3.0, PCB Ant, SMT
XB3-24Z8RS	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, RF Pad Ant, SMT
XB3-24Z8US	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, U.FL Ant, SMT
XB3-24Z8PS	Digi XBee3 PRO, 2.4 Ghz ZB 3.0, PCB Ant, SMT

PRODUCT DIMENSIONS

DIGI XBEE3 MICRO

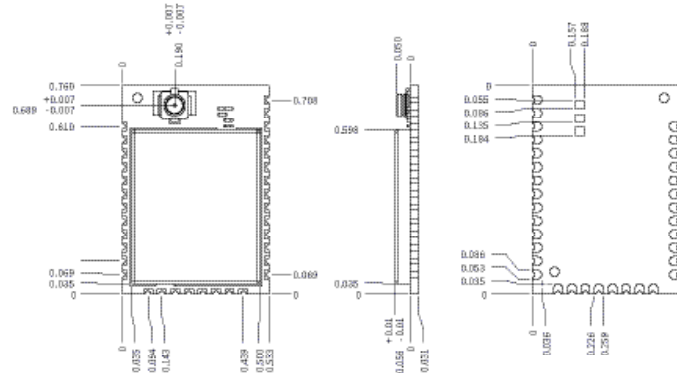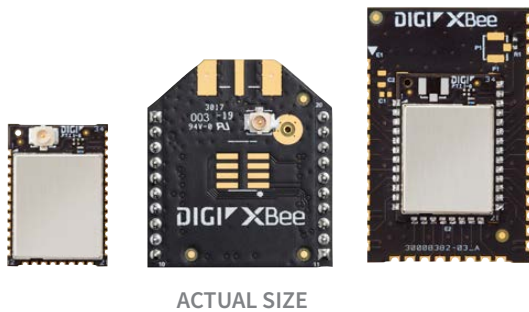

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2018 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91004131
A6/518

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Digi International:

[XB3-24Z8RM-J](#) [XB3-24Z8CM-J](#) [XB3-24DMCM-J](#) [XB3-24Z8UM-J](#) [XB3-24Z8ST](#) [XB3-24DMRM](#) [XB3-24DMUM-J](#)
[XB3-24Z8UT-J](#) [XB3-24AUM-J](#) [XB3-24Z8UM](#) [XB3-24ACM](#) [XB3-24DMCM](#) [XB3-24DMUM](#) [XB3-24ACM-J](#) [XB3-](#)
[24AUM](#) [XB3-24Z8UT](#) [XB3-24Z8RM](#) [XB3-24Z8PS](#) [XB3-24Z8PT-J](#) [XB3-24ARM-J](#) [XB3-24Z8RS](#) [XB3-24Z8CM](#) [XB3-](#)
[24Z8PT](#) [XB3-24Z8RS-J](#) [XB3-24DMRM-J](#) [XB3-24Z8US](#) [XB3-24ARM](#) [XB3-24Z8US-J](#) [XB3-24Z8ST-J](#) [XB3-24Z8PS-J](#)