


NOTES:




1. MATERIALS AND FINISHES
- BODY - BRASS, NICKEL PLATING
- CONTACT - BERYLLIUM COPPER & BRASS, SILVER PLATING
- INSULATOR - PTFE
2. ELECTRICAL:
- A. IMPEDANCE: 50 OHM
- B. FREQUENCY RANGE: DC 0-4 GHz
- C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
- A. DURABILITY: 500 CYCLES MIN.
- B. TEMPERATURE RANGE: - 65°C to +165°C

THIRD ANGLE PROJ.

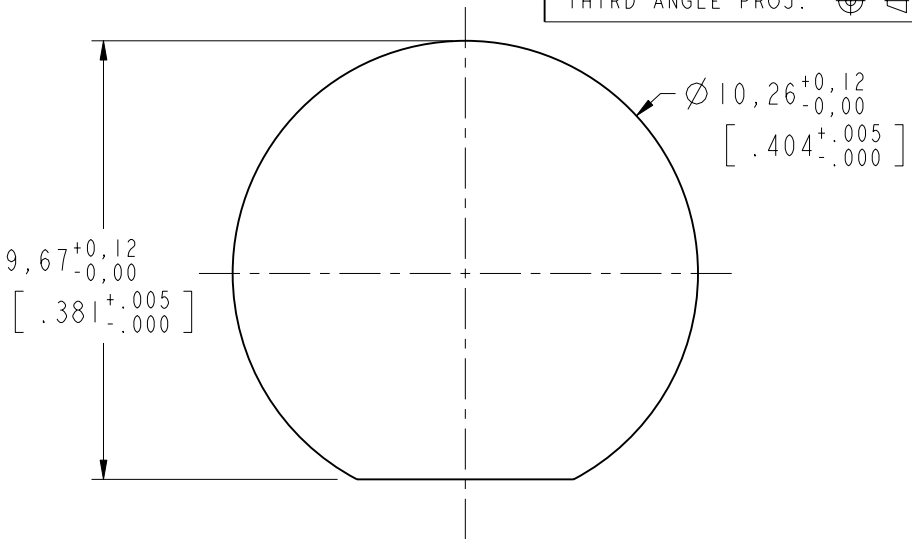

RECOMMENDED MOUNTING
HOLE DIMENSIONS

REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR
	OFFICIAL ENG.RELEASE TO MFG.			
T	REDRAWN TO UPDATE FORMAT, AND 14.2 HEX WAS 14.27 HEX	9-Dec-08		SH
U	STAMP "AMPHENOL" WAS "74868"\RD-DM12092001R3	23-Oct-12	49077	DH

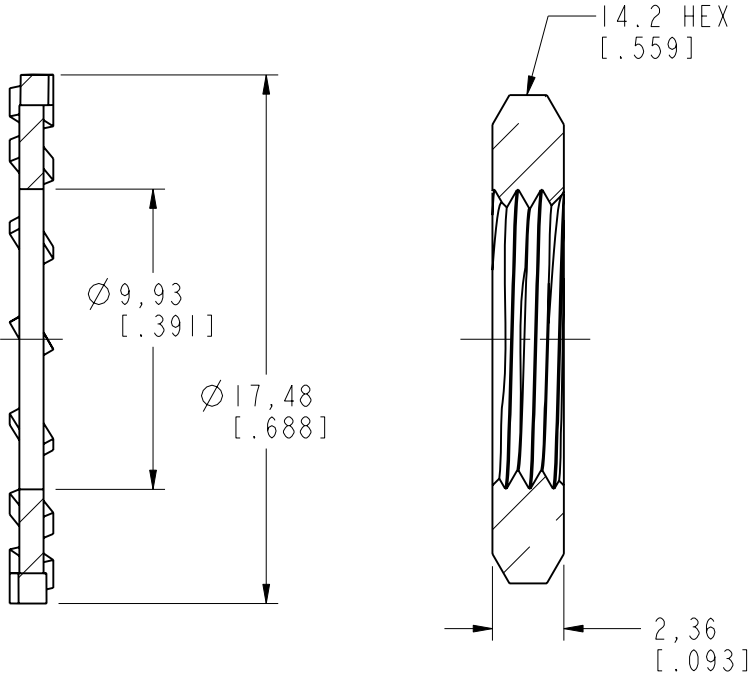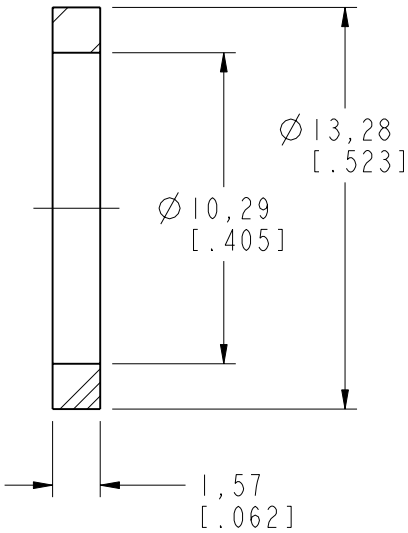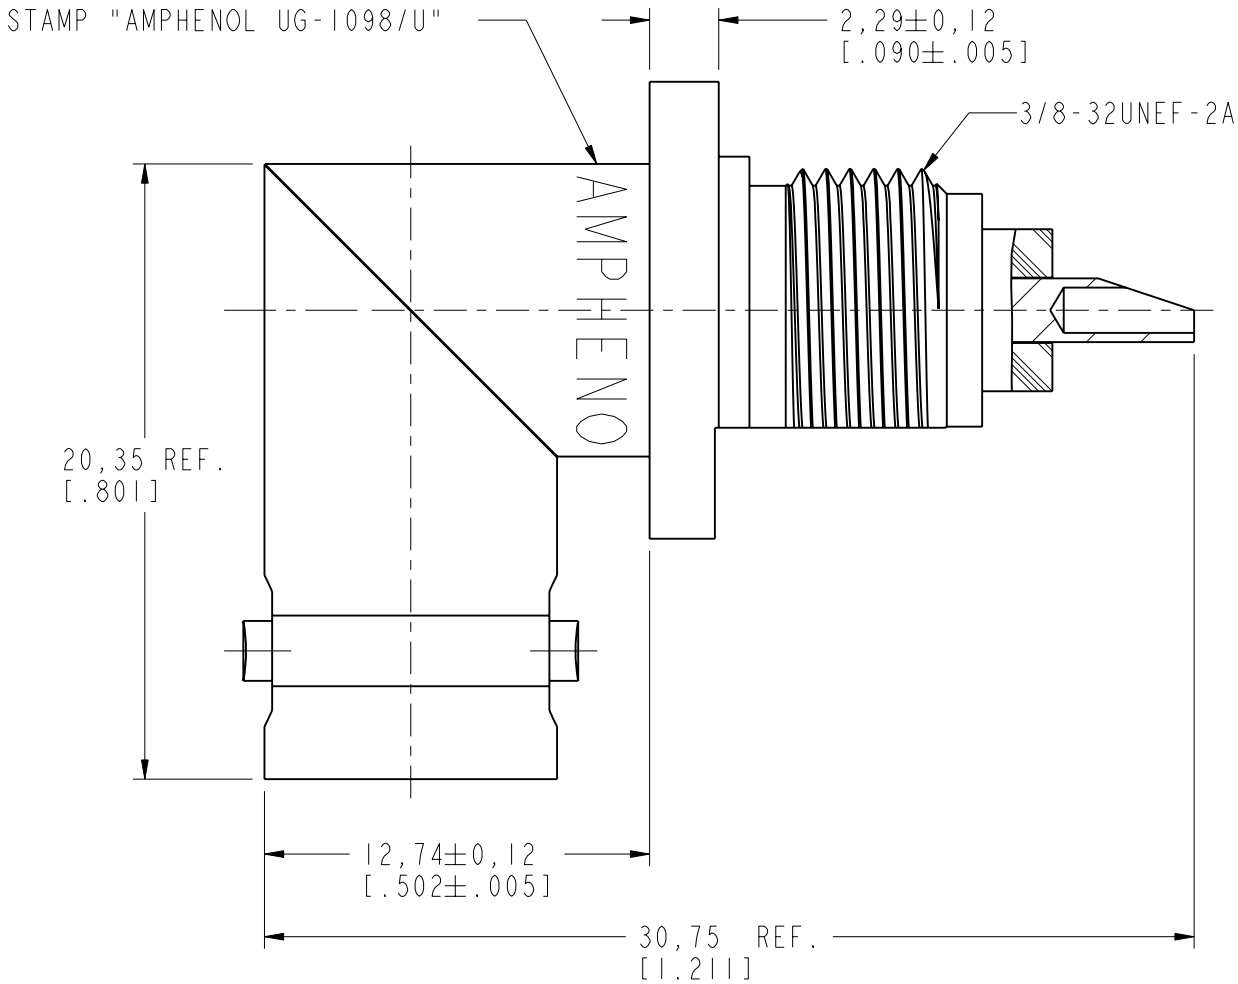

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implicatioin or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwsie, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN R. MAO	DATE 06-Jul-12	TITLE BNC RECEPTACLE RIGHT ANGLE (FOR UG-1098/U)	Amphenol RF www.amphenolrf.com	
	REFERENCE	ENGINEER D. ROYCE	DATE 2/28/91			
	CONFIGURATION LEVEL:	APPROVED HSIEH	DATE 06-Jul-12		DRAWING NO. 31-222	
	FINISH	CAD FILE		SCALE: 4.0:1.0 DWG SIZE B SHEET 2 OF 2 REV U	ITEM NO. 31-222 PART NO. 31-222	