


TSR-3386












■ (Single Turn/ Cermet/ Industrial/ Sealed)

■ (Many Terminal Styles)

Electrical Characteristics	
Standard Resistance Range	10Ω - 5MΩ
Resistance Tolerance	±10% (±20% only for 10 ohm)
Absolute Minimum Resistance	≤1% R 10n
Contact Resistance Variation	CRV≤3%
Insulation Resistance	R _I ≥1GΩ(100Vac)
Withstand Voltage	600Vac
Effective Travel	300° ± 10°

Environmental Characteristics	
Power Rating (315volts max)	0.5W@70°C, 0W@125°C
Temperature Range	-55°C ~ +125°C
Temperature Coefficient	General offer ±250 ppm/°C (±100ppm/°C is available if request.)
Temperature Variatio	-55°C, 30min, +125°C ΔR≤5%R, Δ(Uab/Uac)≤10%
Collision	100m/s ² , 4000cycles, ΔR≤2%R
Electrical Endurance at 70°C	0.5W@70°C, 1000h ΔR≤10%R Δ(Uab/Uac)≤10%, CRV≤3% or 5Ω (200 cycles)
Rotational Life	ΔTR≤10%R, CRV≤3% or 5n

Physical Characteristics	
Starting orque	≤35mN·m
Marking	Resistance Tolerance (When no identification, it is of ± 10%) Resistance Code, Model
Standard Packaging	(50pcs, per tube)

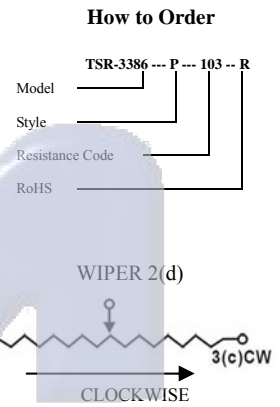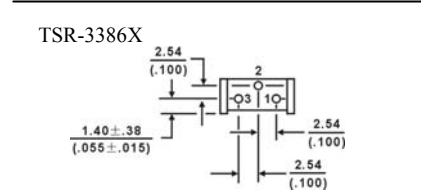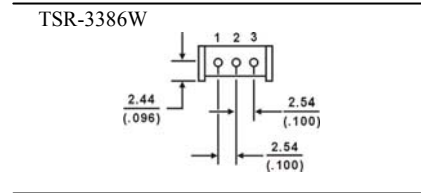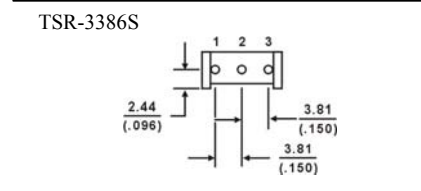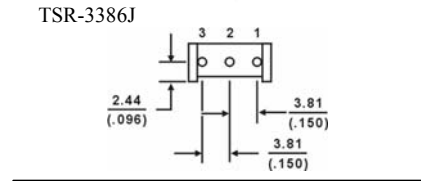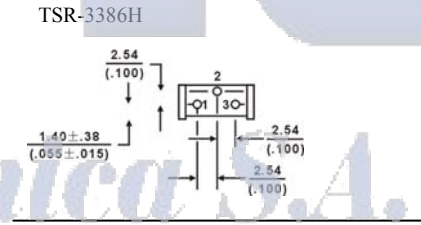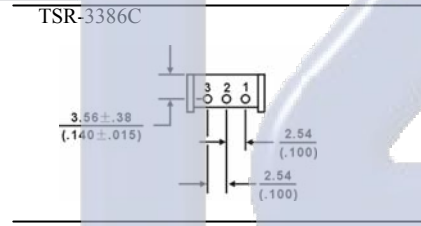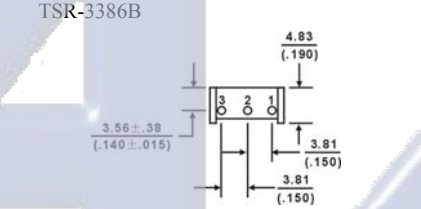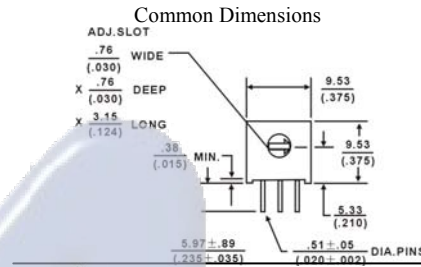

Tolerance is ±0.25 if no identification

Standard Resistance table

Resistance(Ohms)	Resistance Code
10	100
20	200
50	500
100	101
150	151
200	201
250	251
300	30
470	471
500	501
680	681
1,000	102
1,500	52
2,000	202
2,200	222
2,500	252
3,000	302
4,700	472
5,000	502
6,800	682
10,000	103
15,000	153
20,000	203
22,000	223
25,000	253
30,000	303
33,000	333
47,000	473
50,000	503
68,000	683
100,000	104
150,000	154
200,000	204
220,000	224
250,000	254
300,000	304
330,000	334
470,000	474
500,000	504
680,000	684
1,000,000	105
2,000,000	205
2,200,000	225
5,000,000	505

Special resistances available.

